



Light Duty Commercial Upright Energy Saver Electric Water Heater



Photo is of
LD-50S3-3

The Light Duty Upright Electric Models Feature:

- **Fully Automatic Controls**—Fast acting surface-mount thermostats for automatic temperature control. Factory installed sensitive manual reset energy cutoff for safety to prevent overheating (Maximum thermostat setting is 160°F).
- **Direct Heat Transfer With Immersed Elements**—Transfers heat directly and efficiently to the water. Screw-in style.
- **Factory Installed Hydrojet® Total Performance System**—Cold water inlet sediment reducing device helps prevent sediment build up in tank. Increases first hour delivery of hot water while minimizing temperature build up at top of tank.
- **Vitraglas® Lining**—Bradford White water heater tanks are protected from the corrosive effects of hot water by an exclusive ceramic porcelain-like coating. The Bradford White high silica Vitraglas® lining provides a tough interior surface for our water heater tanks.
- **2" Non-CFC Foam Insulation**—Surrounds the tank surface, saving energy by retarding loss of heat.
- **Water Connections**—3/4" NPT factory installed true dielectric fittings extend water heater life and eases installation (LD-120R has 1" NPT dielectric waterway fittings).
- **Factory Installed Heat Traps**—Design incorporates a flexible disk that reduces heat loss in piping and eliminates the potential for noise generation (Except LD-120R).
- **Protective Magnesium Anode Rod**—Provides added protection against corrosion for long trouble-free service.
- **Steel Tank**—Heavy gauge steel automatically formed, rolled and welded.
- **Field Convertible**—Units are shipped from factory Three Phase, Non-Simultaneous (277V is shipped Single Phase, Non-Simultaneous). All models can be converted to Single Phase and/or Simultaneous operation in the field.
- **Voltages Available**—120V, 208V, 240V, 277V, 480V.
- **T&P Relief Valve Installed**—All models have special tapping on top of tank.
- **Brass Drain Valve.**



Copper Screw Type Immersion Element
(Incoloy type immersion element available upon request)



3 or 5-Year Limited Tank Warranties / 1-Year Limited Warranty on Component Parts.

For more information on warranty, please visit www.bradfordwhite.com

For products installed in USA, Canada and Puerto Rico. Some states do not allow limitations on warranties. See complete copy of the warranty included with the heater.

Bradford White received the highest numerical score among water heater/boiler manufacturers in the proprietary J.D. Power and Associates/ McGraw-Hill Construction 2006 HVAC and Water Heater/Boiler Subcontractor Satisfaction Study™. Study based on 882 responses measuring 3 water heater/boiler manufacturers and measures opinions of subcontractors. Proprietary study results are based on experiences and perceptions of subcontractors surveyed in May through July 2006. Your experiences may vary. Visit jdpower.com

MANUFACTURED UNDER ONE OR MORE OF THE FOLLOWING U.S. PATENTS: 5,954,492; 5,761,379; 5,943,984; 5,081,696; 5,988,117; 6,142,216; 5,199,385; 5,574,822; 5,372,185; 5,485,879; 5,277,171; (B1)5,341,770; 5,660,165; 5,596,952; 5,682,666; 4,904,428; 5,023,031; 5,000,893; 4,669,448; 4,829,983; 4,808,356; 5,115,767; 5,092,519; 5,052,346; 4,416,222; 4,628,184; 4,861,968; 4,672,919; Re. 34,534; 7,270,087 B2. OTHER U.S. AND FOREIGN PATENT APPLICATIONS PENDING. CURRENT CANADIAN PATENTS: 1,272,914; 1,280,043; 1,289,832; 2,045,862; 2,112,515; 2,108,186; 2,107,012; 2,092,105; 2,409,271. Vitraglas® and Hydrojet® are registered trademarks of Bradford White® Corporation. ©2007, Bradford White Corporation. All rights reserved. Printed in U.S.A.

Commercial Electric Water Heater

Light Duty Upright Energy Saver Models

Meet or exceed ASHRAE 90.1b (current standard) C.E.C. Listed

Model Number	Capacity		Recovery 100°F Rise		A Floor to Heater Top	B Jacket Dia.	C Floor to Water Conn.	D Floor to T&P Conn.	Approx. Shipping Weight
	U.S. Gal.	Imp. Gal.	U.S. GPH*	Imp. GPH*	in.	in.	in.	in.	
LD-30R3-3	30	25	18	15	47 ¹ / ₂	18	47 ³ / ₁₆	47 ³ / ₁₆	85
LD-40S3-3	40	33	18	15	46 ⁷ / ₈	20	47 ⁷ / ₈	46 ⁷ / ₈	103
LD-50S3-3	50	42	18	15	46 ¹ / ₂	22	47 ¹ / ₂	46 ¹ / ₂	130
LD-65R3-3	65	54	18	15	59 ¹ / ₄	22	60 ¹ / ₄	59 ¹ / ₄	156
LD-80R3-3	80	67	18	15	59 ¹ / ₄	24	60 ¹ / ₄	59 ¹ / ₄	183
LD-120R3-3	119	99	18	15	62 ³ / ₄	28	64 ¹ / ₄	62 ¹ / ₄	305

Model Number	Capacity		Recovery 56°C Rise	A Floor to Heater Top	B Jacket Dia.	C Floor to Water Conn.	D Floor to T&P Conn.	Approx. Shipping Weight
	Liters		Liters/Hour*	mm.	mm.	mm.	mm.	
LD-30R3-3	114		68	1181	457	1224	1199	39
LD-40S3-3	151		68	1191	508	1216	1191	47
LD-50S3-3	189		68	1181	559	1207	1181	59
LD-65R3-3	246		68	1505	559	1530	1505	71
LD-80R3-3	303		68	1505	610	1530	1505	83
LD-120R3-3	450		68	1594	711	1632	1581	138

Specify wattage and voltage when ordering.

Use chart to right for maximum wattages at certain voltages
For 5 year models, change suffix "3" to "5".


*Based on 4500W/4500W, Non-Simultaneous operation.

NSF construction not available.

Wattage	Recovery ▲ GPH Temperature Rise °F				
	60	80	90	100	120
1500W	10	8	7	6	5
2000W	14	10	9	8	7
2500W	17	13	11	10	9
3000W	21	15	14	12	10
3500W	24	18	16	14	12
4000W	28	21	18	16	14
4500W	31	23	21	18	15
5000W	34	26	23	21	17
5500W	38	29	25	23	19
6000W	41	31	28	25	21

Wattage Limitations for Non-Simultaneous and Simultaneous Operation	Voltage				
	120V	208V	240V	277V	480V
1500W / 1500W	yes	yes	yes	yes	yes
2000W / 2000W	no	yes	yes	yes	yes
2500W / 2500W	no	yes	yes	yes	yes
3000W / 3000W	no	yes	yes	yes	yes
3500W / 3500W	no	yes	yes	no	no
4000W / 4000W	no	yes	yes	yes	yes
4500W / 4500W	no	yes	yes	yes	yes
5000W / 5000W	no	yes	yes	yes	yes
5500W / 5500W	no	no	yes	no	no
6000W / 6000W	no	no	no	yes	yes

▲(GPH based on Non-Simultaneous operation, when Simultaneous operation the GPH will approximately double.)

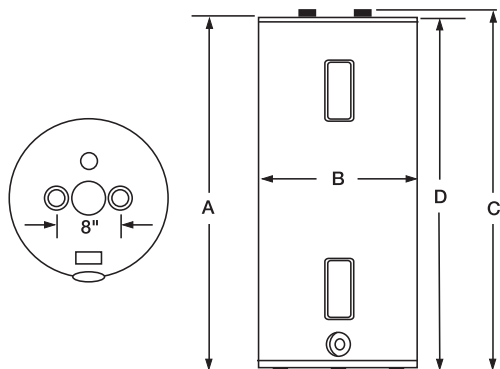

General

All models UL and CUL listed. These heaters are wired inter-locking (Non-Simultaneous, Three Phase) 240V with two 4500W elements, unless otherwise specified.

All water and electrical connections are 3/4" (19mm), 120 gallon model has 1"(25mm) NPT.

All models certified at 300 psi test pressure (2068 kPa) and 150 psi working pressure (1034 kPa.)

Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.



For U.S. and Canada field service, contact your professional installer or local Bradford White sales representative.

Sales 800-523-2931 • Fax 215-641-1670 / Technical Support 800-334-3393 • Fax 269-795-1089 • Warranty 800-531-2111 • Fax 269-795-1089

International: Telephone 215-641-9400 • Telefax 215-641-9750 / www.bradfordwhite.com

BRADFORD WHITE-CANADA INC. Sales / Technical Support 866-690-0961 / 905-238-0100 • Fax 905-238-0105 / www.bradfordwhite.com

Built to be the Best™

©2007, Bradford White Corporation. All rights reserved.